

CB771

E-4

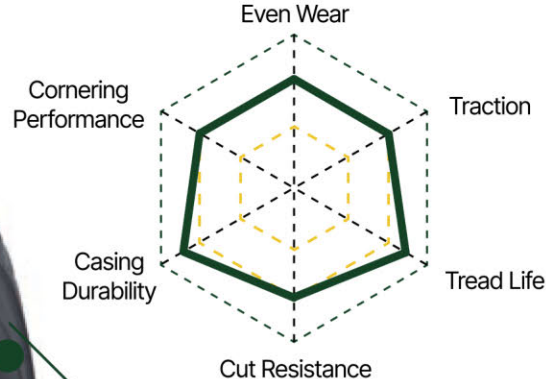

Aggressive lug design with large blocks at tread centre provides excellent traction and braking on rough road

Different compounds to optimize performance in all applications



Additional protective sidewalls are shaped to minimize damage from cutting

Optimised Retreading Ability because of the robust casing



Tyre Size	Star Rating	TRA Code	Service Index	Standard Rim	OD mm inch	SW mm inch	OTD mm 32ND	Inflated Pressure kPa PSI	Type
14.00 R20	★★★★	E-4	166B	10.00	1265 49.8	375 14.8	34 43	700 102	TT/TL
14.00 R24	★★★★	E-4	169B	10.00/2.0	1420 55.9	375 14.8	38 48	700 102	TT
14.00 R25	★★★★	E-4	169B/188A2	10.00/2.0	1420 55.9	375 14.8	38 48	700 102	TT / TL
16.00 R25	★★★★	E-4	180B	11.25/2.0	1500 59.1	428 16.9	44 55	800 116	TT/TL
NEW! 460/95R25	★★★★	E-4	183B	11.25/2.0	1520 59.8	460 18.1	44 55	800 116	TT / TL
18.00 R25	★★	E-4	185B	13.00/2.5	1675 65.9	500 19.7	51 64	700 102	TL
	★★★★	E-4	189B					800 116	
NEW! 16.00R29	★★★★	E-4	182B/200A2	11.50/2.5-29	1616 63.6	448 17.6	44 55	700 102	TT/TL
NEW! 480/95R29	★★★★	E-4	190B/204A2	13.00/2.5-29	1615 63.6	480 18.9	44 55	900 131	TT/TL
NEW! 505/95R29	★★★★	E-4	193B	13.00/2.5-29	1730 68.1	505 19.9	44 55	900 131	TT / TL
NEW! 525/95R29	★★★★	E-4	198B	13.00/2.5-29	1760 69.3	525 20.7	44 55	1000 145	TT / TL
18.00 R33	★★	E-4	191B	13.00/2.5	1875 73.8	500 19.7	54 68	700 102	TL
	★★★★	E-4	195B					800 116	
21.00 R33	★★	E-4	200B	15.00 / 3.0	1955 77.0	570 22.4	54 68	700 102	TL
	★★★★	E-4	203B					800 116	
21.00 R35	★★	E-4	201B	15.00 / 3.0	2050 80.7	570 22.4	61 77	700 102	TL
	★★★★	E-4	204B					800 116	
24.00 R35	★★	E-4	209B	17.00 / 3.5	2175 85.6	655 25.8	65 82	700 102	TL
	★★★★	E-4	212B					800 116	